

Conceala 3 Concealed Syphon Operated Cistern Including Lever

ILLUSTRATED

S1347 Conceala 3 single flush 6 litre cistern, side inlet, lever operated, easy adjustable to low water volumes, internal overflow, flushpipe and lever included

ILLUSTRATED PRODUCT DETAILS

Weights

S1347 2.70 KG

Finishes

S1347  Chrome (AA)

Materials


S1347 Plastic

Standards

BS EN 14055

Special Notes

215mm Lever included, check wall thickness requirements. Water volumes adjusted by changing the plug positions on the syphon bell. Please refer to installation instructions before fitting.

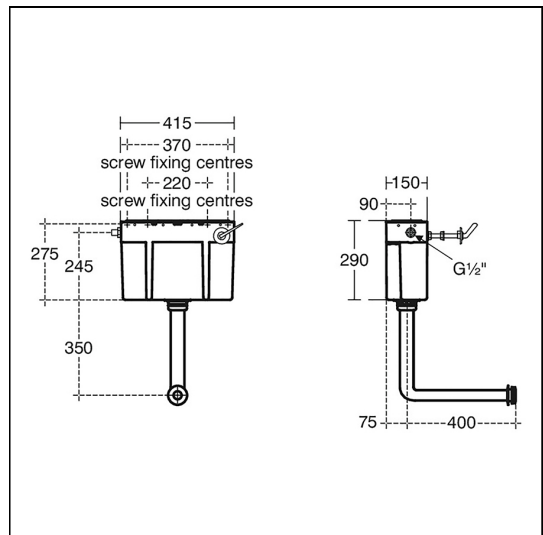

FEATURES



Conceala 3 Concealed Dual Flush, Bottom Inlet, Cable Operated Cistern Including Chrome Push Button

ILLUSTRATED

S3328 Conceala 3 dual flush 6/4 litre cistern, bottom inlet, cable operated actuation, internal overflow, flushpipe and chrome push button included

ILLUSTRATED PRODUCT DETAILS

Weights

S3328 2.70 KG

Finishes

S3328  Chrome (AA)

Materials


S3328 Plastic

Standards

Cistern to BS EN 14055

Special Notes

Cable operated cistern. Includes dual push button. Easy adjustment on the outlet valve for lower water volumes. Please refer to the installation instructions before fitting.

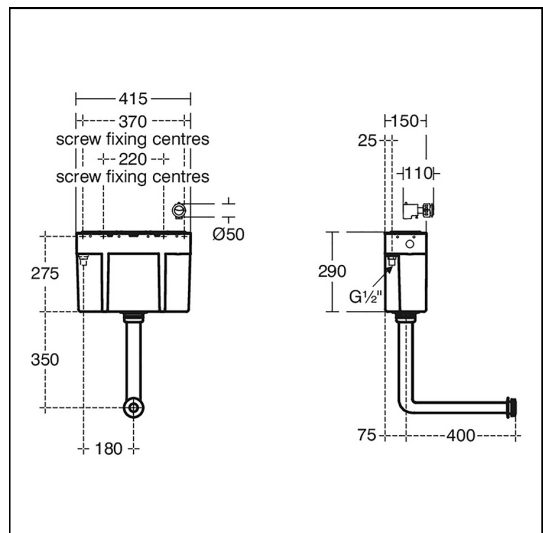

ACCREDITATIONS

FEATURES



Conceala 3 Concealed Single Flush, Side Inlet Cistern, Pneumatic

ILLUSTRATED

S3324 Conceala 3 single flush 6 litre cistern, side inlet, pneumatic actuation, easy adjustable to low water volumes, internal overflow, flushpipe included, no button/flushplate.

OPTIONS

- S1083** Contemporary single finger pneumatic push button
S1085 Contemporary pneumatic palm push button

ILLUSTRATED PRODUCT DETAILS

Weights

S3324 2.30 KG

Finishes

S3324  Neutral / No Finish (67)

Materials


S3324 Plastic

Standards

Cistern to BS EN 14055

Special Notes

Cistern is supplied with 800mm length of plastic air tube. An optional 3m length (SV316) can be purchased where remote operation is required. Easy adjustment on the outlet valve for lower water volumes. Please refer to the installation instructions before fitting. Actuator purchased separately.

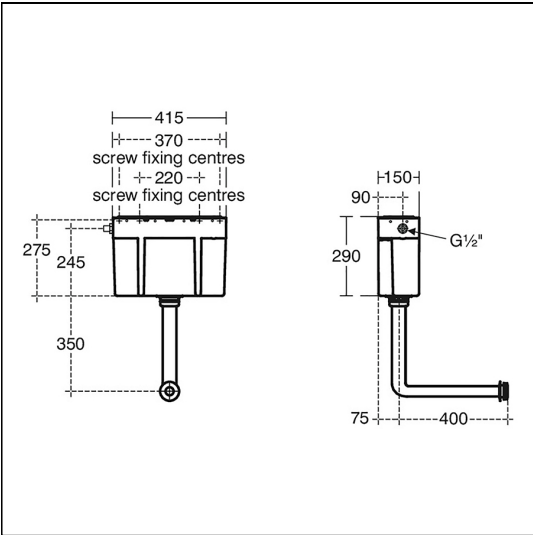

ACCREDITATIONS

FEATURES



Conceala 3 Pneumatic Side Inlet, Adjustable Dual Flush Cistern

ILLUSTRATED

S3326 Conceala 3 dual flush 6/4 litre cistern, side inlet, pneumatic actuation, easy adjustable to low water volumes (4.5/3 or 4/2.6 litres), internal overflow, flushpipe included, no button/flushplate

S1082 Contemporary dual flushplate for Conceala cisterns

OPTIONS

S1084 Crescent finger push button, pneumatic dual flush

ILLUSTRATED PRODUCT DETAILS

Weights

S3326 2.70 KG

S1082 0.35 KG

Finishes

S3326  Neutral / No Finish (67)

S1082  Chrome (AA)

Materials

S3326 Plastic

S1082 Chrome Plated Plastic

FINISH OPTIONS

 (AA) Chrome

 (MY) Stainless Steel finish


 (A6) Black

Standards

Cistern to BS EN 14055

Special Notes

Cistern is supplied with 800mm length of plastic air tube. An optional 3m length (SV316) can be purchased where remote operation is required. Please refer to the installation instructions before fitting. Actuator purchased separately. Easy adjustment on outlet valve to lower water volumes. Set at 6/4, adjustment to 4.5/3 or 4/2.6 litres.

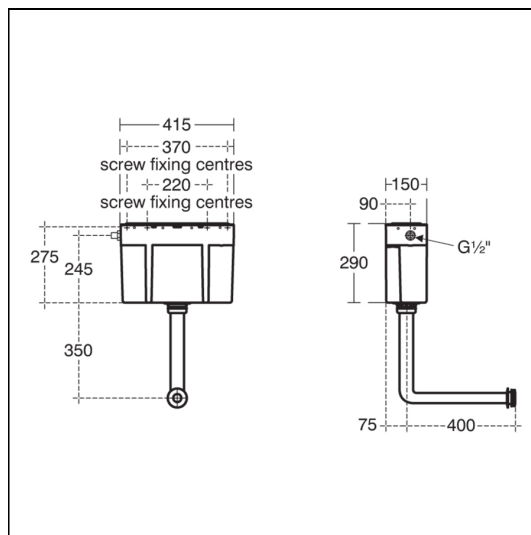

ACCREDITATIONS



Inlet Valve 2103024 Outlet Valve 2107101

FEATURES



Conceala 3 Concealed Single Flush, Side Inlet Lever Operated Cistern

ILLUSTRATED

- S3329** Conceala 3 single flush 6 litre cistern, side inlet, lever operated, easy adjustable to low water volumes, internal overflow, flushpipe included, no lever
- S4491** Lever flushing Conceala 2 extended 250mm

OPTIONS

- S4492** Lever flushing Conceala 2 extended 400mm
- S4516** Lever flushing spatula for Conceala cistern
- E6021** Modern concealed cistern lever 405mm

ILLUSTRATED PRODUCT DETAILS

Weights

- S3329** 2.30 KG
- S4491** 0.66 KG

Materials

- S3329** Plastic
- S4491** Chrome Plated Metal

Standards


Cistern to BS EN 14055

Special Notes

Choice of lever, purchased separately, check wall thickness requirements.
Water volumes adjusted by changing the plug positions on the syphon bell.
Please refer to installation instructions before fitting.

Finishes

- S3329**  Neutral / No Finish (67)
- S4491**  Chrome (AA)

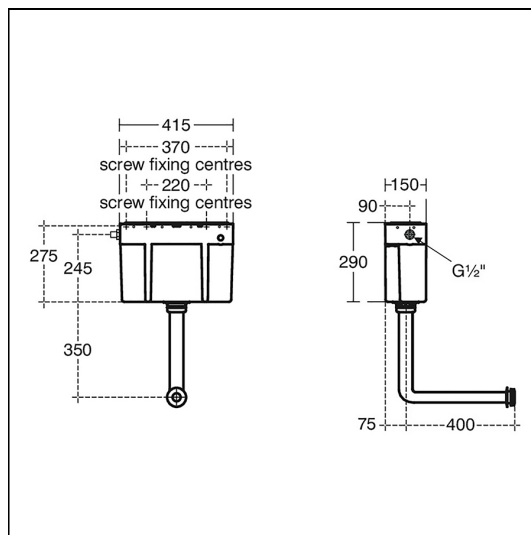

ACCREDITATIONS

FEATURES



Conceala 3 High Level Pneumatic Operated Side Inlet Cistern

ILLUSTRATED

S3331	Conceala 3 high level single flush 6 litre cistern, side inlet, pneumatic actuation, internal overflow, no push button
S1085	Contemporary pneumatic palm push button
S4662	Plastic Flushpipe For Top Inlet Slop Hopper

OPTIONS

S1083	Contemporary single finger pneumatic push button
--------------	--

ILLUSTRATED PRODUCT DETAILS

Weights

S3331	2.30 KG
S1085	0.08 KG
S4662	0.10 KG

Materials

S3331	Plastic
S4662	Plastic

Finishes

S3331	 Neutral / No Finish (67)
S1085	 Chrome (AA)
S4662	 White (01)

FINISH OPTIONS




Standards

Cistern to BS EN 14055

Special Notes

High level pneumatic cistern complete with 2.5m air tube. Extended pipe purchased separately.
Please refer to installation instruction before fitting.

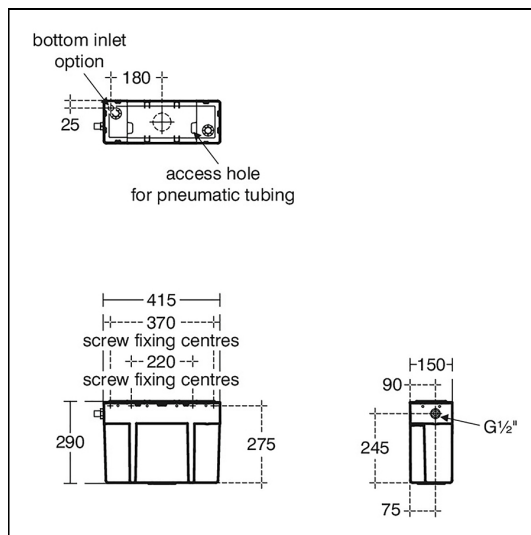

ACCREDITATIONS

Conceala 3 Sensorflow 21 Single Flush, Side Inlet Cistern, Panel Mounted Sensor

ILLUSTRATED

S3333 Conceala 3 Sensorflow 21 single flush 6 litre cistern, side inlet, panel mounted touch free sensor actuation, internal overflow, flushpipe included

ILLUSTRATED PRODUCT DETAILS

Weights

S3333 3.15 KG

Materials

S3333 Plastic

Standards

Cistern to BS EN 14055

Special Notes


Mains powered Sensorflow products must be connected to a continuous permanent power supply of these require 220-240 volts and each 1 having its own fuse spur
Please refer to the installation instructions before fitting.

Finishes

S3333  Neutral / No Finish (67)

Capacity

S3333 6.0 litres

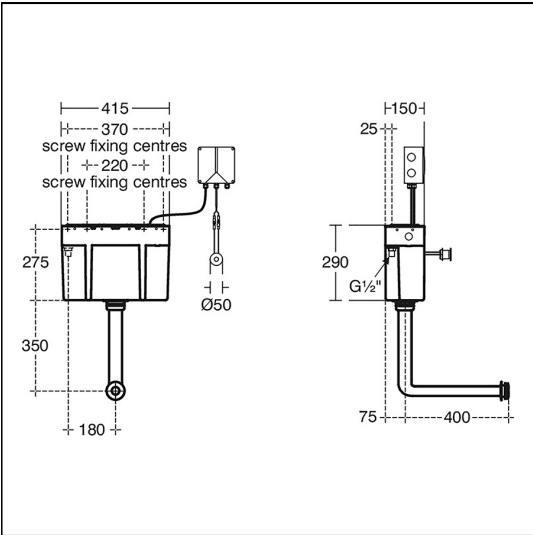

ACCREDITATIONS

S3333(67)



FEATURES

