

Apollo Cycle Shelter

BXMW/AP

broxap[®]
street furniture



A popular cycle shelter comprising tubular curved end frames and a curved roof.


Features:

- Robust modular construction featuring tubular end frames
- Heavy-duty circular uprights and box section purlins and trimmers, assembled with anti-tamper high strength bolts
- Anti-climb end frames
- Hot dipped galvanised to BS EN ISO 1461:2022
- 4mm ClearView PETg UV roof cladding
- Can contribute towards gaining ENE8 credits when used in the appropriate situation, under the Code for Sustainable Homes
- BREEAM and Code for Sustainable Homes Compliant



☎ 01782 564411
✉ info@broxap.com
🌐 www.broxap.com

Dimensions

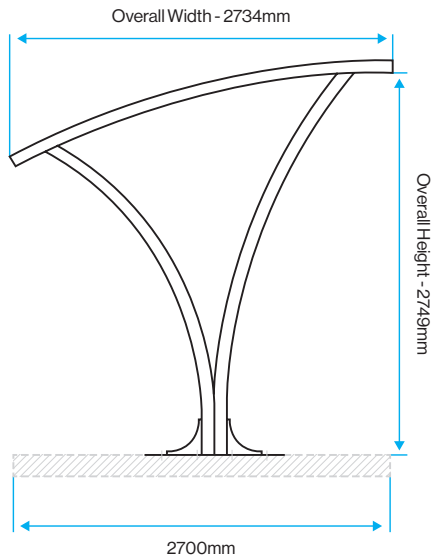

Standard RAL/BS Colours

RAL 9005	RAL 9001	RAL 9016	BS 4800 00 A 05
BS 4800 10 A 07	RAL 9006	RAL 7016	RAL 3009
RAL 3020	RAL 8004	RAL 8007	RAL 1023
RAL 6021	BS 4800 14 C 39	RAL 6005	RAL 5014
RAL 5015	RAL 5013	BS 4800 20 C 40	RAL 5021

Product Details

Product Name	Apollo Cycle Shelter
Product Code	BXMW/AP
Dimensions	Width: 2753mm Height (Front): 2860mm Height (Rear): 2150mm
Lengths & Capacities	3600mm (8 Cycles) 4100mm (10 Cycles) 5000mm (12 Cycles) 6000mm (14 Cycles)
Framework	Galvansied steel
Cladding	4mm PETG UV (standard) 5mm Clear View PETg UV Opal cladding Steel trapezoidal roof
Weather Resistance	Cladding is UV Stabilised Wind resistant to 23m/s
Fire Resistance	Cladding is fire tested to EN ISO 11925-2
Finish Options	Hot-Dip Galvanised to BS EN ISO 1461:2022 Hot-Dip Galvanised & Polyester Power Coated 60mm-120mm dft Hot-Dip Galvanised with Duplex (Zinc Coated) Powder Coating (coastal) 180-240 overall dft
Additional Options	Polyester powder coated in any standard RAL/BS colour LED or solar lighting Expandable modular design Varied range of cycle racks Varied range of cycle stands Full installation service
Fixing	Surface mounted baseplate Submerged baseplate Extended adjustable baseplates